

SURFACE MOUNT LED EXIT 24M


The SP-2001 is designed as a surface mount emergency exit light allowing 2hours minimum lighting after power cut.

4pcs PVC stickers are included.

Usage: widely used in modern hotels,shops and other public places,security evacuation and guide.



Item code	SP-2001
Input Voltage	220-240AC
Frequency	50/60Hz
Battery	4.8V 1200mAh NI-MH
Charge time	16hours
Discharge time	2 hours
Operating Temp	0°C~40°C
Side	Single/double
IP Grade	IP20
Material of the Lamp	Flame retardant (V-0)
Size of the Lamp	show as below
PVC sticker	4pcs
LED Power	3W
Light Source	2*16pcs LED(White)
LED lifespan	>50,000 hours
Work mode	Maintain
Installation	Ceiling or wall mount
Indicator	Red-Charging
cable	No,only AU connectors
Protection	Over-charge /over-discharge
Standard	AS/NZS 2293 IEC 60598-2-22

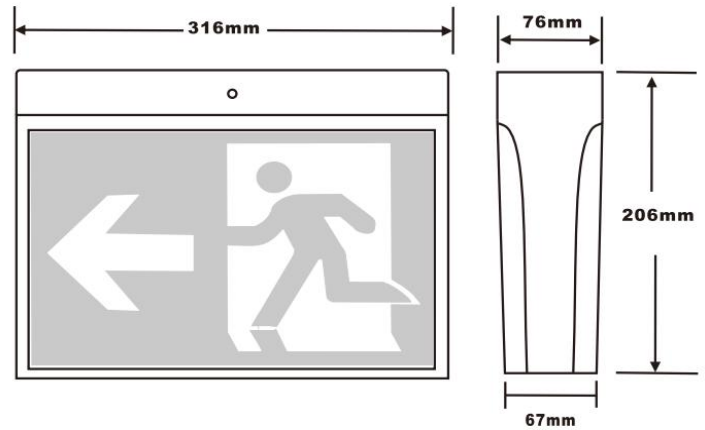

Model No.	classification	Operation	Charging mode	Discharging duration	Emergency mode battery	DC power
SP-2001-WH	24M	maintain	3W	120min	NI-MH 4.8V1200MAH	1W
SP-2001-BK	24M	maintain	3W	120min	NI-MH 4.8V1200MAH	1W



Ta 0°C-40°C



Tested By **Nemko**

Certified By



AS/NZS 2293 CERTIFIED