Specifications

II CLIPSAL[®]



Switched Socket Outlet, Classic C2000 Series, Twin, 250V, 10A

C2025-WE

Main

Range of product	Classic Series C2000
Product brand	Clipsal
Complementer	
Complementary	
control type	ON/OFF button
Number of gangs	2 gangs
Pin number	3
Number Of Outlets	2
Actuator	Rocker Switch
Mounting Type	By screws
local signalling	Without light indicator
Installation Orientation	Horizontal
Material	Plastic
Surface finish	Glossy
[Ue] rated operational voltage	250 V AC
[In] rated current	10 A
Depth	28 mm
Length	116 mm
Width	76 mm
Mounting Centers	84 mm

Environment

Standards

AS/NZS 3112


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.5 cm
Package 1 Width	2.5 cm
Package 1 Length	12 cm
Package 1 Weight	104 g

Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	13.4 cm
Package 2 Width	14.6 cm
Package 2 Length	16.4 cm
Package 2 Weight	1.112 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

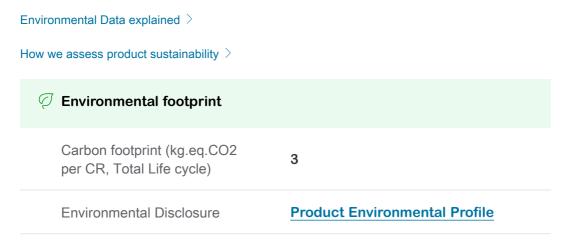

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Νο
EU RoHS Directive	Compliant with Exemptions
REACh Regulation	REACh Declaration
China RoHS Regulation	China RoHS declaration

Use Again

\circlearrowright Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	Νο