

HA-KIT-A2

Four-Wire HD Video Intercom Kit



- HD TVI video quality
- Plug & play
- One-press to call
- One-press to unlock the door
- Max 2 door stations and 3 indoor stations in one system

▪ Specification


Door station	
Supplement light	IR light, up to 3 m
Resolution	Stream resolution: 1280 * 720@60fps
FOV	Horizontal: 130°, Vertical: 70°
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Door station	
Lock control	1 relay, max 30V 1 A
Debugging port	1
Four-wire	1 four-wire interface
Door station	
Button	1 physical button(s)
Indicator	/
Power supply	12 VDC
Power consumption	Max. 4W
Working temperature	-30° C to + 60° C
Working humidity	10% to 90%
Dimensions	136mm x 51mm x 20mm
Application environment	Indoor
Protective level	/
Installation	Surface mounting
Material	Plastic
Indoor station	
Operation method	Physical button
Type	7-inch colorful TFT
Resolution	1024 x 600
Indoor station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Indoor station	
Linked indoor extensions capacity	2
Linked doorphone capacity	2
Linked analog camera	1
Indoor station	
Power supply input	12V DC
Debugging port	1
Four-Wire interface	4, 2 for indoor extentions, 2 for doorphones
DIP switch	1 Bit
BNC	1
Indoor station	
Button	4 physical button

Power supply	12 VDC
Power consumption	≤5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions (W × H × D)	178mm x 132mm x 19mm
Installation	Surface mounting
Application environment	Indoor
Protective level	/


▪ **Available Model**

HA-KIT-A2

▪ **Dimension**

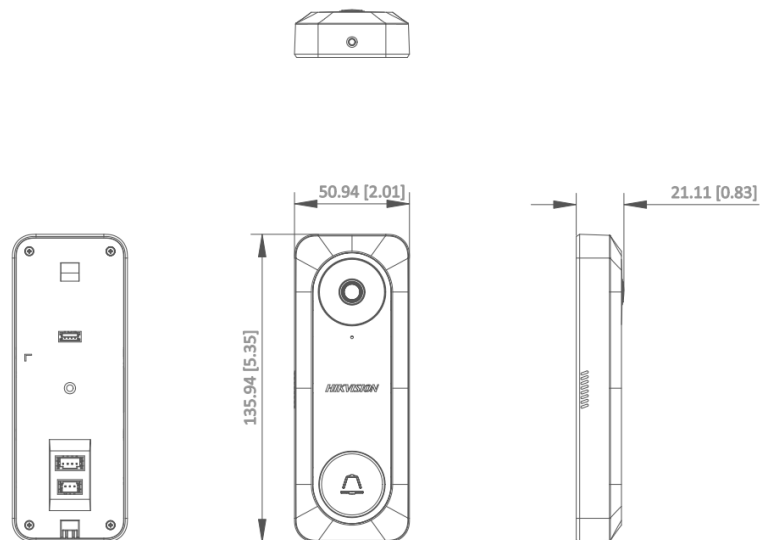

Unit:mm [inch]

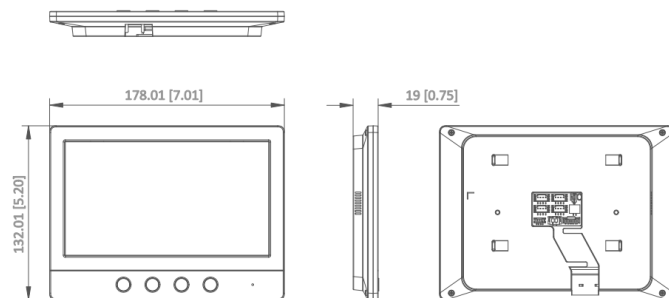

Unit:mm [inch]

HiLook

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.

