

RAPID RESPONSE

GRILLES WITH LED













The stylish and modern Rapid Response Grille with LED light will brighten up any bathroom, ensuite or toilet. LED light can be set to warm white, cool white or daylight by changing the Tri-Switch's position. The Rapid Response grilles are quick to install and can be easily removed for cleaning.

- Available in Round and Square models.
- Available in 2 sizes to suit 8" and 10" Rapid Response header box fan models.
- Stylish, contemporary design.
- LED light & Rapid Response Fan can be controlled separately.
- Quick & easy to install.
- · Can be retrofitted to a previously installed Rapid Response Fan.
- Square grilles can be easily rotated to align with walls.

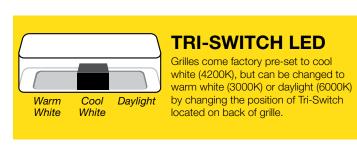

^{*}Conditions apply. For details visit: fantechtrade.com.au/warranty






	MODEL NO.	GRILLE	A□	В	CØ	D
	RESPG8-SQWH-TRILED	8" Square Grille White Finish with Tri-Switch LED	300	28	-	-
	RESPG8-SQBK-TRILED	8" Square Grille Black Finish with Tri-Switch LED	300	28	-	-
	RESPG8-RNWH-TRILED	8" Round Grille White Finish with Tri-Switch LED	-	-	294	19
	RESPG8-RNBK-TRILED	8" Round Grille Black Finish with Tri-Switch LED	-	-	294	19
	RESPG150SQWH-TRILED	10" Square Grille White Finish with Tri-Switch LED	353	30	-	-
	RESPG150SQBK-TRILED	10" Square Grille Black Finish with Tri-Switch LED	353	30	-	-
	RESPG150RNWH-TRILED	10" Round Grille White Finish with Tri-Switch LED	-	-	332	24
	RESPG150RNBK-TRILED	10" Round Grille Black Finish with Tri-Switch LED	-	-	332	24


SPECIFICATIONS

MODEL NO.	GRILLE	LUMENS (LM)	INPUT POWER (W)	COLOUR TEMP (K)	BEAM ANGLE
RESPG8-SQWH-TRILED RESPG8-SQBK-TRILED	Square	1000	12	3000/4200/6000	180°
RESPG8-RNWH-TRILED RESPG8-RNBK-TRILED	Round	800	9	3000/4200/6000	180°
RESPG150SQWH-TRILED RESPG150SQBK-TRILED	Square	1000	12	3000/4200/6000	180°
RESPG150RNWH-TRILED	Round	800	9	3000/4200/6000	180°



(Colour Temperature: 3000K)







All dimensions in mm

(Colour Temperature: 4200K)

(Colour Temperature: 6000K)

Colour indicated in drawings above is for illustrative purposes only.

[†] Rating is for grille face when installed only. Components installed in ceiling space are IP4X rated.